

# WILSONWERKS ARCHIVES


This camera manual is for reference and historical purposes, all rights reserved.

This cover page is copyrighted material. This document may not be sold or distributed without the express consent of the publisher.

©2008-2025 wilsonwerks Llc

A GUIDE  
A GUIDE TO  
A GUIDE TO THE MINOLTA SLR SYSTEM  
THE MINOLTA SLR SYSTEM  
TO THE MINOLTA SLR SYSTEM  
MINOLTA SLR SYSTEM OF CREATIVE PHOTOGRAPHY  
TA SLR SYSTEM OF CREATIVE PHOTOGRAPHY  
R SYSTEM OF CREATIVE PHOTOGRAPHY  
EM OF CREATIVE PHOTOGRAPHY  
IVE PHOTOGRAPHY



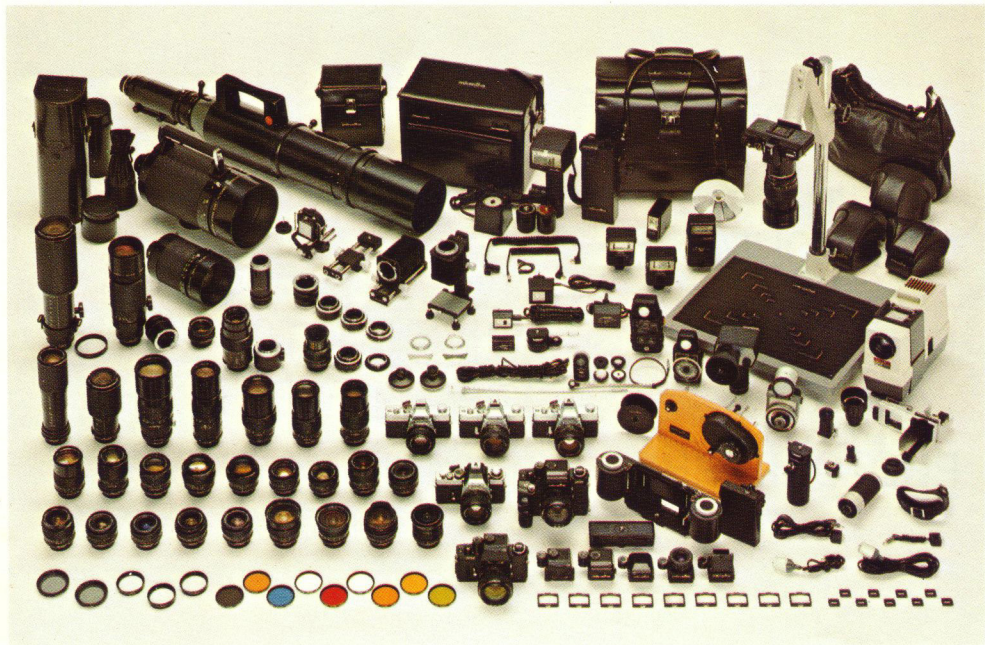

## The Minolta SLR System of Creative Photography

Minolta makes a really complete 35mm photographic system so that you can be a really complete photographer. Now that you own one of the famous Minolta SLR cameras, you have the nucleus of the world's finest system of 35mm photography. Your potential is practically unlimited.

Judged by any standards of photographic excellence, Minolta SLR cameras are thoroughly professional instruments of uncompromising quality. With their versatile complement of Rokkor and adapted Leitz lenses and precision Minolta and Leitz accessories, they are capable of mastering virtually any photographic situation imaginable.

Minolta makes more than 150 lenses, accessories, and attachments for use with Minolta SLR cameras. Encompassed are interchangeable Rokkor lenses, including-meter-coupled zoom-type, from 7.5 mm fish-

eye to 1600mm extreme telephoto plus the full range of accessories and attachments shown on the facing page. Most of these are described in this booklet.

Now that you own a Minolta SLR camera, you owe it to yourself to fit it with genuine Minolta and adapted Leitz accessories and particularly with MC Rokkor interchangeable lenses that match it in quality. MC Rokkor lenses are made expressly for your SLR, and Leitz lenses and accessories are specially adapted by Minolta for it. To assure best results, be sure you get these genuine products; they are the only ones that will give you maximum performance every time.

The object of the Minolta SLR system is to give every photographer, no matter what his skill, a creative choice in all areas of photography. Your Minolta dealer can demonstrate the full SLR camera, lens, and accessory line and help you choose the equipment that best suits your needs. See him for technical help, too. Your adventures in creative photography may very well begin in his store.

## How Minolta Makes a Rokkor Lens

Minolta is one of only three camera companies in Japan and one of a very few in the world that make their own optical glass and lenses. This little-known fact becomes very important when you consider that only in this way can a camera company ensure the precise optical and mechanical design properties so vital to advanced photography.

Before a Rokkor lens is mounted on a Minolta camera, it passes through a complex series of manufacturing steps performed to the highest standards in the camera

industry. Each Rokkor lens, in fact, is the end result of a long series of computations and tests aimed at eliminating the various aberrations that interfere with theoretically perfect lens performance. What kinds of glass should be used? What should the curvature and diameter of lens elements be? How should they be positioned? Minolta lens designers, aided by Minolta's own electronic computer, investigate and decide on these and many other problems long before the actual making of a lens.

### The Basic Ingredients

The "recipe" of glass-making ingredients varies with the type of glass to be made. Among the materials often used are silica, sodium carbonate, alumina, barium, and lead oxide. Among many other ingredients that may be added to obtain special characteristics for quality Rokkor lenses are tho-

rium, zirconium, and rare-earth elements such as lanthanum.

The measured materials are melted and stirred in crucibles (platinum-lined ones for high-index glasses) at temperatures in the neighborhood of 1500°C for many hours, then gradually cooled over a period of days. The congealed glass is broken into easily-handled fragments which are subjected to rigid inspections for bubbles, striae, and other defects, and imperfect pieces or parts are discarded. The perfect lumps are split into weight-sized pieces, which are tumbled, heat-softened, and hydraulically pressed into blanks. From one to two further weeks of fine annealing processing relieves internal stresses and adjusts refractive index.

#### **Grinding, Polishing, and Achromatic Coating**

Diamond grinders are used for initial shaping of the disk-shaped lens blanks, which

are then further rough-ground with abrasive to approximate curvature. The rough-ground lens elements then pass through a series of mechanized abrasive and rough polishers with continual curvature gauging to produce the final high-precision finish. Optical centering and assembly in special dust- and temperature-controlled facilities precede final rigid adjustment and testing.

Conventional lens coating is done with magnesium fluoride, but Minolta, for decreased flare and improved color rendition, pioneered in developing a special technique called "Achromatic Coating" a decade and a half ago. This exclusive process provides a double coating of fluorides plus other ingredients to yield a very high rate of light transmission as well as superior color rendition. As a result, Rokkor lenses give rich, true color tones—better than any other lens made today we are sure you'll agree.





### Focal Length, Lens "Speed," and Angle of View

The focal length of a lens is the distance from a calculated point on the lens axis (usually at or near the lens diaphragm for medium focal lengths) to the film plane when the lens is focused at infinity.

Dividing the focal length by the diameter of the diaphragm aperture yields the f-number at the lens opening. At any constant focal length, the f-number thus becomes smaller as the aperture diameter becomes larger, but the volume of light passed by the lens increases. At usual apertures, each f-number setting in the series allows trans-

mission of twice the light volume of the next numerically smaller one and half that of the next numerically larger one. For example, when you change the lens setting from  $f/5.6$  to  $f/4$ , light passing through the lens is doubled. Changing the setting from  $f/5.6$  to  $f/8$ , on the other hand, cuts light transmitted in half. One such doubling or halving is one full f-stop.

The "speed" of a lens is indicated by its maximum aperture: The larger this lens opening (i.e., the smaller the f-number), the "faster" the lens. An  $f/1.4$  lens is considered one stop faster than, or twice as fast as, an  $f/2$ .

Angle of view is a measurement in degrees of the amount of a scene included across the diagonal of the frame covered by the lens at a given distance. As focal length decreases, angle of view generally increases: Thus, a 50mm standard lens has an angle of view approximately double that of a 100mm telephoto, and a 28mm wideangle takes in about twice as much of a scene as does the 58mm.

## Cleaning and Storage of Lenses

If a lens becomes dusty or soiled, loose matter may be whisked off with a bellows lens brush and the glass surface wiped gently with a soft, clean cloth.

Lenses should be stored away from heat, high humidity, and harmful chemicals and vapors. Always keep lenses capped in their cases when they are not in use.

When attaching or removing a lens from the camera body, be careful not to touch the glass surfaces.



### Rokkor Wideangle Lenses

These lenses have a number of interesting and useful applications for both amateur and professional photographers. With their ability to take in a large part of a scene at short distances, they are especially useful when working at close quarters. Their exaggerated perspective suits them to use for special effects and in creative photography. Both these characteristics of wideangle lenses are employed to advantage in architectural photography.

The short focal length of wideangle lenses gives them considerable depth of field even at large apertures or short distances. This inherent extra depth of field can aid in making sharp photos at peak action without the delay needed for adjusting focus.

Naturally, each of these Rokkor wideangles is a meter-coupled, auto-diaphragm lens designed to permit full-aperture metering/viewing and operation as normal with no need for mirror lock-up.

### 7.5mm f/4 MC Fisheye Rokkor

Construction: 12 elements in 8 groups

Angle of view: 180°

Focusing: Fixed at 1.2m (4 ft.)

covering 0.5m (1.75 ft.) to infinity at full aperture

Diaphragm: Auto preset f/4–f/22

Filters: Built-in



### 16mm f/2.8 MC Fisheye Rokkor


Construction: 11 elements in 8 groups

Angle of view: 180°

Min. focus distance: 0.3m (1 ft.)

Filters: Built-in

Diaphragm: Auto preset f/2.8–f/16

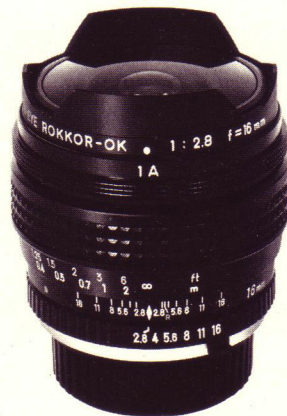



8

**17mm f/4 MC W Rokkor**

Construction: 11 elements in 9 groups  
 Angle of view: 104°  
 Min. focus distance: 0.25m (0.8 ft.)  
 Filter thread diameter: 72mm  
 Diaphragm: Auto preset f/4–f/16

**21mm f/2.8 MC W Rokkor**

Construction: 12 elements in 9 groups  
 Angle of view: 91°  
 Min. focus distance: 0.25m (0.8 ft.)  
 Filter thread diameter: 72mm  
 Diaphragm: Auto preset f/2.8–f/16

**24mm f/2.8 MC W Rokkor**

Construction: 9 elements in 7 groups  
 Angle of view: 84°  
 Min. focus distance: 0.3m (1 ft.)  
 Filter thread diameter: 55mm  
 Diaphragm: Auto preset f/2.8–f/16



**28mm f/3.5 MC W Rokkor**

Construction: 5 elements in 5 groups

Angle of view: 76°

Min. focus distance: 0.3m (1 ft.)

Filter thread diameter: 55mm

Diaphragm: Auto preset f/3.5–f/16

**28mm f/2.8 MC W Rokkor**

Construction: 7 elements in 7 groups

Angle of view: 76°

Min. focus distance: 0.3m (1 ft.)

Filter thread diameter: 55mm

Diaphragm: Auto preset f/2.8–f/16

**28mm f/2 MC W Rokkor**

Construction: 10 elements in 9 groups

Angle of view: 76°

Min. focus distance: 0.3m (1 ft.)

Filter thread diameter: 55mm

Diaphragm: Auto preset f/2–f/16



10

**35mm f/2.8 Shift CA Rokkor**

Construction: 9 elements in 7 groups  
Angle of view: 81°  
Min. focus distance: 0.3m (1 ft.)  
Filter thread diameter: 55mm  
Diaphragm: Auto preset f/2.8–f/22



**35mm f/2.8 MC W Rokkor**

Construction: 5 elements in 5 groups  
Angle of view: 64°  
Min. focus distance: 0.3m (1 ft.)  
Filter thread diameter: 55mm  
Diaphragm: Auto preset f/2.8–f/16



**35mm f/1.8 MC W Rokkor**

Construction: 8 elements in 6 groups  
Angle of view: 64°  
Min. focus distance: 0.3m (1 ft.)  
Filter thread diameter: 55mm  
Diaphragm: Auto preset f/1.8–f/16







## Rokkor Standard Lenses

The MC Rokkor 50mm f/1.7 and f/1.4 and the 58mm f/1.2 lenses are widely known as the fine "normal" or "standard" lenses for Minolta SLR cameras and are well suited for most general photographic purposes.

All are ideal for available-light photography indoors and for other low-illumination situations.

Light in weight and styled with "human-engineered" waffle-pattern rubber focusing grips, these standard lenses, like all MC Rokkors, are fitted with automatic iris diaphragms and meter-coupling lug rings. They thus provide for full-aperture light metering or focusing with the diaphragm always open to maximum aperture except at the instant of exposure.

### 50mm f/1.7 MC Rokkor

Construction: 6 elements in 5 groups

Angle of view: 47°

Min. focus distance: 0.5m (1.75 ft.)

Filter thread diameter: 55mm

Diaphragm: Auto preset f/1.7–f/16



### 50mm f/1.4 MC Rokkor

Construction: 7 elements in 5 groups  
Angle of view: 47°  
Min. focus distance: 0.5 m (1.75 ft.)  
Filter thread diameter: 55mm  
Diaphragm: Auto preset f/1.4–f/16



### 58mm f/1.2 MC Rokkor

Construction: 7 elements in 5 groups  
Angle of view: 41°  
Min. focus distance: 0.6m (2 ft.)  
Filter thread diameter: 55mm  
Diaphragm: Auto preset f/1.2–f/16





### Rokkor Telephoto and Zoom Lenses

Tele Rokkor lenses are available in a wide range of fixed or continuously variable focal lengths that starts with 80mm and extends through 1600mm. Like the wideangle and standard Rokkors, all are fully meter- and auto-diaphragm-coupled for full-aperture metering/viewing, except for the RF Rokkors, with which the stop-down method is used.

The 85mm, 100mm, and 135mm Tele Rokkors have long been popular among working professionals. All are ideal for candid or portrait photography, allowing greater working distances from subjects and preventing distortion of features (nose, ears, chin) nearest the lens.

The Rokkor 200mm and 300mm telephotos offer even more optical "reach" for the

sports, nature, or human-interest photographer yet are lightweight and compact enough to be hand-held. They are invaluable for photographing unapproachable subjects such as distant landmarks or to keep you a safe distance from dangerous objects and situations. The 400mm f/5.6 MC Apo Tele Rokkor incorporates a fluorite element for eliminating the undesirable "secondary spectrum" that degrades images. It is ideal for long-lens work requiring particularly sharp definition, and attached with the special MC 2X Converter it becomes a top-quality 800mm meter-coupled super tele.

Each of the MC Zoom Rokkor lenses allows the photographer to select the exact focal length he wants from an infinite number within a particularly useful range. Both 80–200mm and 100–200mm models thus provide in only one lens the collective telescopic advantages of the short and medium fixed telephotos mentioned above—and more. Each of these lenses is a light, compact new design equipped for full-aperture metering/focusing and automatic diaphragm

operation. And each can be zoomed and focused with one hand on the positive, comfortable grip of waffle-textured rubber—another instance of the easy handling Minolta is famous for.

The catadioptric-type 800mm and 1600 mm RF Rokkors utilize precision ground-and-polished mirrors in combination with conventional refractive lens elements in their designs. Light travels the length of the barrel three times in an overlapping reflex path, resulting in relatively small bulk for such enormous focal lengths.

This compactness is particularly striking in the 800mm RF Rokkor, which yields some 16 times the magnification of a standard lens yet can even be used hand-held—rare with optics of this great focal length.

Both of these mirror lenses are suited for sports, landscape, and nature photography at extreme distances. Lens-stop settings for them are achieved with neutral-density filters, which, like the special "sharp-cut" filters provided, constitute integral elements of the optical system.



**85mm f/1.7 MC Rokkor**

Construction: 6 elements in 5 groups

Angle of view: 29°

Min. focus distance: 1m (3.3 ft.)

Filter thread diameter: 55mm

Diaphragm: Auto preset f/1.7–f/22

**100mm f/2.5 MC Tele Rokkor**

Construction: 5 elements in 5 groups

Angle of view: 24°

Min. focus distance: 1m (3.5 ft.)

Filter thread diameter: 55mm

Diaphragm: Auto preset f/2.5–f/22



### 135mm f/3.5 MC Tele Rokkor


Construction: 4 elements in 4 groups

Angle of view: 18°

Min. focus distance: 1.5m (5 ft.)

Filter thread diameter: 55mm

Diaphragm: Auto preset f/3.5–f/22

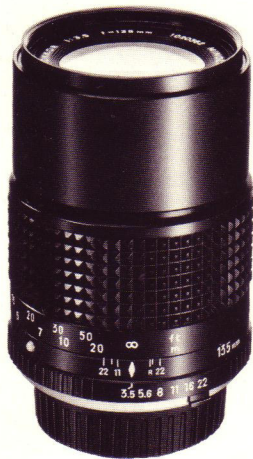

### 135mm f/2.8 MC Tele Rokkor

Construction: 4 elements in 4 groups

Angle of view: 18°

Min. focus distance: 1.5m (5 ft.)

Filter thread diameter: 55mm

Diaphragm: Auto preset f/2.8–f/22



**200mm f/4 MC Tele Rokkor**

Construction: 5 elements in 5 groups  
Angle of view: 12°  
Min. focus distance: 2.5m (8 ft.)  
Filter thread diameter: 55mm  
Diaphragm: Auto preset f/4–f/22

**300mm f/5.6 MC Tele Rokkor**

Construction: 5 elements in 5 groups  
Angle of view: 8°  
Min. focus distance: 4.5m (15 ft.)  
Filter thread diameter: 55mm  
Diaphragm: Auto prese f/5.6–f/22







**300mm f/4.5 MC Tele Rokkor**

Construction: 6 elements in 6 groups  
Angle of view: 8°  
Min. focus distance: 4.5m (15 ft.)  
Filter thread diameter: 72mm  
Diaphragm: Auto preset f/4.5–f/22

**400mm f/5.6 MC Apo Tele Rokkor**

Construction: 7 elements in 6 groups  
Angle of view: 6°  
Min. focus distance: 5m (16 ft.)  
Filter thread diameter: 72mm  
Diaphragm: Auto preset f/5.6–f/32  
Accessories: MC 2X Converter



### 800mm f/8 RF Rokkor

Construction: 2 mirrors,  
8 lens elements in 7 groups  
Angle of view: 3°  
Min. focus distance: 8m (26 ft.)  
Filters: Integral lens-element type  
F-stops: f/8 and f/16 by ND filters



### 800mm f/6.3 Leitz Telyt-S

Construction: 3 elements in 1 group  
Angle of view: 3°  
Min. focus distance: 12.5m (41 ft.)  
Filters: Leitz series 7  
Filter thread diameter: 138mm



(Available only through)  
Leitz Dealers

### 1600mm f/11 RF Rokkor

Construction: 2 mirrors,  
6 lens elements in 5 groups  
Angle of view: 1° 30'  
Min. focus distance: 20m (70 ft.)  
Filters: Built-in  
F-stops: f/11 and f/22 by ND filters



**40-80mm f/2.8 MC Zoom Rokkor**

Construction: 12 elements in 12 groups

Angle of view: 57°–30°

Min. focus distance: 1m (3.3 ft.)

0.37m (1.2 ft.) at close-up setting

Filter thread diameter: 55mm

Diaphragm: Auto preset f/2.8–f/22

**80–200mm f/4.5 MC Zoom Rokkor**

Construction: 14 elements in 10 groups

Angle of view: 30°–12°

Min. focus distance: 1.8m (6 ft.)

Filter thread diameter: 55mm

Diaphragm: Auto preset f/4.5–f/32



**100–200mm f/5.6 MC Zoom Rokkor**

Construction: 8 elements in 5 groups

Angle of view: 24°–12°

Min. focus distance: 2.5m (8 ft.)

Filter thread diameter: 55mm

Diaphragm: Auto preset f/5.6–f/22

**100–500mm f/8 MC Zoom Rokkor**


Construction: 16 elements in 10 groups

Angle of view: 24°–5°

Min. focus distance: 2.5m (8ft.)

Filter thread diameter: 72mm

Diaphragm: Auto preset f/8–f/32





巖手六景  
神奈川  
波



**24mm f/2.8 MC VFC Rokkor**

This is the world's first lens whose field of sharp focus can be varied continuously at will from concave through flat to convex by simply moving a control ring on the barrel. Thus, even if distances from center and edges of objects to the film plane are too different to be covered by depth of field (particularly at close range and/or large apertures), sharp photos having excellent image quality can be obtained of many subjects by appropriately curving the field. On the other hand, this capability can also be used creatively to deliberately render parts of the subject out of focus, or the lens can be used as a conventional flat-field wideangle. Either way, optimum image quality is assured by the "floating" focusing system and Minolta Achromatic coating incorporating latest techniques.

**24mm f/2.8 MC VFC Rokkor**

Construction: 9 elements in 7 groups


Angle of view: 84°

Min. focus distance: 0.3mm (1 ft.)


Filter thread diameter: 55mm

Diaphragm: Auto preset f/2.8-f/16



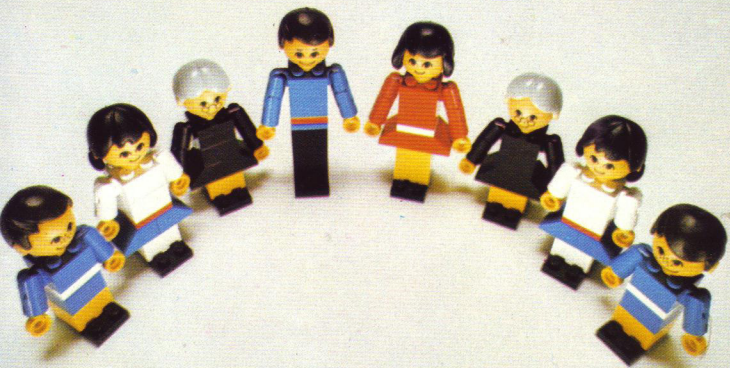

*Photo on right was taken with the VFC Rokkor's field curved in the "wrong" direction, above photo at the same focus and aperture setting shows the result of curving it to conform to the subject.*

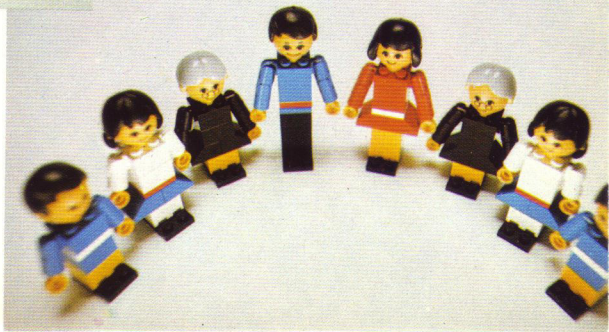



## **Close-ups and Photomacrography: Striking New Views of Ordinary Objects**

Of all the kinds of photography possible with the Minolta SLR system, the two that probably yield that most consistently unusual pictures are close-up photography and photomacrography.

For even the beginning photographer the possibilities in these fields are practically unlimited, and the results are almost always uncommonly exciting. Everyday objects such as stamps or coins, mechanical subjects such as the movements or gears of a wrist watch, insects, plants and myriads

more take on aspects missed by the human eye. The commonplace becomes extraordinary through magnification.

The world of close-ups and photomacrography—i.e., close pictures at up to a dozen or so times life size—provides a stimulating challenge for any photographer to test his techniques and imagination. But today, particularly using a TTL-metering Minolta SLR with special attachments makes these kinds of photography easier, faster, and more practical than ever before.

The main advantage of using these cameras with accessories for close-ups or photomacrography is that the through-the-lens metering system eliminates the need to calculate exposure factor or effective aperture. It thus does away with the most complicated and troublesome factor involved with longer-than-normal extension: Since light is measured through the lens and any other Minolta close-up or extension devices being used, all adjustment for exposure is completely automatic, regardless of magnification ratio.

**50mm f/3.5 MC Macro Rokkor**

Construction: 6 elements in 4 groups

Angle of view: 47°

Min. focus distance: 0.23m (9 in.)

Filter thread diameter: 55mm

Diaphragm: Auto preset f/3.5–f/22

Accessories: Life-Size Adapter,

**100mm f/3.5 MC Macro Rokkor**

Construction: 5 elements in 4 groups

Angle of view: 24°

Min. focus distance: 0.45m (1.5 ft.)

Filter thread diameter: 55mm

Diaphragm: Auto preset f/3.5–f/22

Accessory: Life-Size Adapter



*Used with a Minolta SLR, the 50mm and 100mm MC Macro Rokkors make photomacrography easier than ever before. All information required to determine magnification ratio and adjust exposure with non-TTL cameras is engraved on the lens barrel. With our TTL SR-T series cameras, the lens is set for correct exposure simply by turning its aperture ring until the two needles are aligned in the viewfinder. With our new electronic-shutter models, exposure control can be completely automatic. Either of these lenses attaches to any Minolta SLR camera and focuses all the way from infinity to half life-size in its regular mount without attachments. Using the life-size adapter, magnification ratios from half life-size to 1:1 (life size) can be obtained. Each of these lenses may also be used for ordinary photography with excellent results.*



**100mm f/4 Auto Bellows Rokkor**

Construction: 3 elements in 3 groups

Angle of view: 24°

Filter thread diameter: 55mm

Diaphragm: Auto preset f/4—f/32



*This lens is designed with a short mount and no focusing ring for use with the Auto Bellows I (see page 40). The focusing range with this bellows is all the way from infinity to 1:1 magnification (life size) on the film. This lens' relatively great focal length enables greater lens-to-subject distance, with resulting greater freedom in placement of lighting equipment. Its automatic diaphragm operation facilitates focusing and viewing up to and after the moment of exposure.*







**12.5mm f/1.9 Leitz Photar**

Construction: 4 elements in 4 groups  
Mount: Minolta SLR bayonet (on adapter)  
Magnification: 5X to 20X  
Diaphragm: Manual f/2–f/8

(Available only through)  
Leitz Dealers

**25mm f/2.5 Leitz Photar**

Construction: 6 elements in 4 groups  
Mount: Minolta SLR bayonet (on adapter)  
Magnification: 2X to 10X  
Diaphragm: Manual f/2.5–f/16

(Available only through)  
Leitz Dealers



*Leitz' 12.5mm f/1.9 and 25mm f/2.5 Photar macro lenses with their Minolta SLR bayonet-mount adapters cover the range between magnifications practicable with Minolta SLR's and Rokkor lenses and accessories for extreme close-ups and for photomicrography.*

*Magnifications of about 5X (five times actual subject size) can be obtained using a 50mm lens with the Auto Bellows I and extension tubes. Using these adapted Leitz macro lenses, however, the same equipment and bellows extension will produce magnifications up to 20X, which falls in the lowest range usually available with Minolta photomicrography equipment.*


*The key to the usefulness of the Photar lenses is thus their short focal lengths, which make possible high magnifications without greatly increasing the lens-to-film distance. Further, their special macro lens design yields exceptional photographic quality.*



LENS	ELEMENTS GROUPS	METER-COUPLED AUTO-DIAPHRAGM	ANGLE OF VIEW	MINIMUM FOCUS	MINIMUM F-STOP	FILTER-MOUNT DIAMETER	DIMENSIONS	WEIGHT
7.5mm f/4 MC FISHEYE ROKKOR	12 8	Yes	180°	0.5m/1.75 ft.	f/22	Built-in	φ68×63mm	360g/12½ oz.
16mm f/2.8mm MC FISHEYE ROKKOR	11 8	Yes	180°	0.3m/1 ft.	f/16	Built-in	φ70.5×63.5mm	440g/15½ oz.
17mm f/4 MC W ROKKOR	11 9	Yes	104°	0.25m/0.8 ft.	f/16	72mm	φ75×53mm	330g/11½ oz.
21mm f/2.8 MC W ROKKOR	12 9	Yes	91°	0.25m/0.8 ft.	f/16	72mm	φ75×66.5mm	510g/1 lb. 1¼ oz.
24mm f/2.8 MC W ROKKOR	9 7	Yes	84°	0.3m/1 ft.	f/16	55mm	φ65×50mm	395g/13¾ oz.
28mm f/3.5 MC W ROKKOR	5 5	Yes	76°	0.3m/1 ft.	f/16	55mm	φ64.5×41.5mm	220g/7¾ oz.
28mm f/2.8 MC W ROKKOR	7 7	Yes	76°	0.3m/1 ft.	f/16	55mm	φ64.5×43.5mm	240g/8½ oz.
28mm f/2 MC W ROKKOR	10 9	Yes	76°	0.3m/1 ft.	f/16	55mm	φ65.5×61mm	340g/12 oz.
35mm f/2.8 MC W ROKKOR	5 5	Yes	64°	0.3m/1 ft.	f/16	55mm	φ64.5×41.5mm	220g/7¾ oz.
35mm f/1.8 MC W ROKKOR	8 6	Yes	64°	0.3m/1 ft.	f/16	55mm	φ66×67.5mm	415g/14¾ oz.
50mm f/1.7 MC ROKKOR	6 5	Yes	47°	0.5m/1.75 ft.	f/16	55mm	φ64.5×41mm	230g/8½ oz.
50mm f/1.4 MC ROKKOR	7 5	Yes	47°	0.5m/1.75 ft.	f/16	55mm	φ65×46mm	305g/10¾ oz.
58mm f/1.2 MC ROKKOR	7 5	Yes	41°	0.6m/2 ft.	f/16	55mm	φ70.5×54mm	475g/1 lb. ¾ oz.
85mm f/1.7 MC ROKKOR	6 5	Yes	29°	1m/3.3 ft.	f/22	55mm	φ71×62mm	455g/1 lb.
100mm f/2.5 MC TELE ROKKOR	5 5	Yes	24°	1m/3.5 ft.	f/22	55mm	φ64.5×64.5mm	375g/13¾ oz.
135mm f/3.5 MC TELE ROKKOR	4 4	Yes	18°	1.5m/5 ft.	f/22	55mm	φ64.5×88.5mm	420g/14¾ oz.
135mm f/2.8 MC TELE ROKKOR	4 4	Yes	18°	1.5m/5 ft.	f/22	55mm	φ64.5×89.5mm	535g/1 lb. 2¼ oz.

LENS	ELEMENTS	GROUPS	METER-COUPLED AUTO-DIAPHRAGM	ANGLE OF VIEW	MINIMUM FOCUS	MINIMUM F-STOP	FILTER-MOUNT DIAMETER	DIMENSIONS	WEIGHT
200mm f/4 MC TELE ROKKOR	5	5	Yes	12°	2.5m/8 ft.	f/22	55mm	φ64.5×131mm	520g/1 lb. 2¼ oz.
300mm f/5.6 MC TELE ROKKOR	5	5	Yes	8°	4.5m/15 ft.	f/22	55mm	φ65×186mm	695g/1 lb. 8½ oz.
300mm f/4.5 MC TELE ROKKOR	6	6	Yes	8°	4.5m/15 ft.	f/22	72mm	φ80×199.5mm	1175g/2 lb. 9¾ oz.
400mm f/5.6 MC APO TELE ROKKOR	7	6	Yes	6°	5m/16 ft.	f/32	72mm	φ83×256.5mm	1470g/3 lb. 3¾ oz.
800mm f/8 RF ROKKOR	3	1	No	3°	8m/26 ft.	f/16	Built-in	φ125×166.5mm	2000g/4 lb. 6¾ oz.
Telyt-S 800mm f/6.3	3	1	No; manual	3°	12.5m/41 ft.	f/32	138mm	φ152×796.5mm	6860g/15 lb. 1¼ oz.
1600mm f/11 RF ROKKOR	3	1	No	1°30'	20m/70 ft.	f/22	Built-in	φ178×322.5mm	6700g/14 lb. 11¼ oz.
40-80mm f/2.8 MC ZOOM ROKKOR	12	12	Yes	57°-30°	1m/3.3 ft.	f/22	55mm	φ66×93.5×98.5mm	560g/1 lb. 3¼ oz.
80-200mm f/4.5 MC ZOOM ROKKOR	14	10	Yes	30°-12°	1.8m/6 ft.	f/32	55mm	φ74×156mm	700g/1 lb. 8¾ oz.
100-200mm f/5.6 MC ZOOM ROKKOR	8	5	Yes	24°-12°	2.5m/8 ft.	f/22	55mm	φ63.5×173mm	575g/1 lb. 4¼ oz.
100-500mm f/8 MC ZOOM ROKKOR	16	10	Yes	24°-5°	2.5m/8 ft.	f/32	72mm	φ91×330mm	2010g/4 lb. 6¾ oz.
24mm f/2.8 MC VFC ROKKOR	9	7	Yes	84°	0.3m/1 ft.	f/16	55mm	φ67×50mm	325g/11¼ oz.
35mm f/2.8 SHIFT CA ROKKOR	9	7	Auto diaph'm	81°	0.3m/1 ft.	f/22	55mm	φ83.5×71.5mm	560g/19¼ oz.
50mm f/3.5 MC MACRO ROKKOR	6	4	Yes	47°	0.23m/9 in.	f/22	55mm	φ66.5×55.5mm	325g/11¼ oz.
100mm f/3.5 MC MACRO ROKKOR	5	4	Yes	24°	0.45m/1.5 ft.	f/22	55mm	φ74.5×88.5mm	600g/1 lb. 5¼ oz.
100mm f/4 AUTO BELLOWS ROKKOR	3	3	Auto diaph'm	24°	-	f/32	55mm	φ63.5×35mm	155g/5¼ oz.
Photar 12.5mm f/1.9	4	4	No; manual	Magnification: 5× to 20×	-	f/8	-	φ25.5×12.5mm	30g/1¼ oz.
Photar 25mm f/2.5	6	4	No; manual	Magnification: 2× to 10×	-	f/16	-	φ28×15.5mm	50g/1¼ oz.



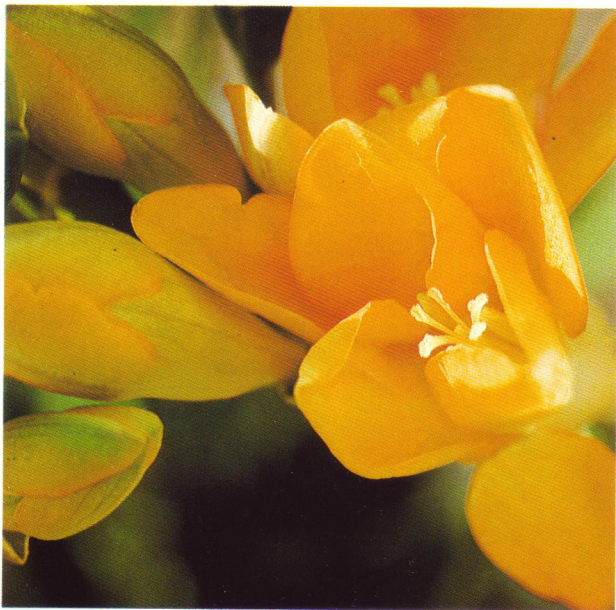


## The Tools of Close-up Photography and Photomacrography

Even without accessories or attachments, the standard lenses on Minolta SLR cameras permit a considerable variety of close-up photography. The MC Rokkor 58mm f/1.2 lens can be focused for pictures as close as 60cm (1.97 ft.) in its standard mounting on the camera. The 50mm f/1.4 focuses down to 55cm (1.75 ft.) just as it is. But to get closer to your subject for even more dramatic results, use Minolta's special equipment designed to provide photographs much larger than life size.

The simple combination of a Minolta SLR camera with 50mm lens and a supplementary screw-on close-up lens is sufficient, at modest cost, to do many close-ups and copying. For more specialized work, you can select from a range of Minolta extension tubes and bellows, special Rokkor and Leitz lenses, and so on for the performance and flexibility needed.

### Extension Tube Set II

This set of five separate tubes can be used in various combinations for close-up photography with Rokkor lenses. Function of the tubes is to increase magnification by lengthening the lens-to-film distance. Selection of the proper extension tube or combination depends on the area to be covered or the image size required. When used with TTL Minolta SLR cameras, no compensation for exposure is necessary since exposure readings may be taken directly through the tube and lens combination.

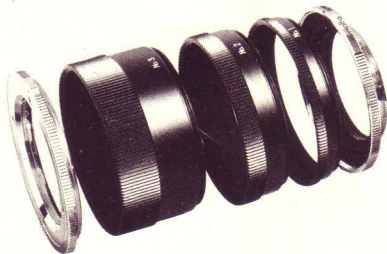

### MC Auto Extension Tubes

The purpose of this set of three tubes is the same as for the Extension Tube Set II, but it offers refinements that provide greater ease of use. Full meter- and automatic-diaphragm coupling enables full-aperture metering/focusing, with the diaphragm closing down to the preset aperture only at the moment of exposure with Minolta SLR's and MC Rokkor lenses. Each of the three tubes has a Minolta SLR bayonet on one end and a matching receptacle on the other; this all-bayonet system makes for fast, easy attaching and changing.



### Reverse Ring II

The Minolta Reverse Ring II enables using various Minolta lenses, particularly wideangle and normal, turned front to rear for considerably improved image quality at magnifications greater than life size (1:1 image-to-subject reproduction ratio).



### Bellows III

Modest in price, compact, and lightweight, this quality bellows attaches to the camera in the same way as a lens and provides calibrated extension between lens and film by means of a scale engraved on the track. Magnifications between 0.75X and 2.96X can be obtained with this unit and a 50mm lens. Among the optional accessories common to this unit and the Auto Bellows I described on the next page is a slide copier attachment for duplicating transparencies.




### Auto Bellows I

This deluxe, double-track bellows performs all of the functions of the Bellows III on page 39 and further features an automatic-diaphragm coupling device. With MC lenses, this coupler allows focusing and viewing at full-aperture brightness, with the lens closing down to the preset aperture only at the moment of exposure. Used with a standard 50mm lens, the Auto Bellows I permits a continuous range of magnifications from 0.7X to 3X. The detachable focusing rail can also be used separately for focusing or positioning a camera equipped with lens only, extension tubes, or a close-up lens.



### Copy Stand II


A rigid camera support that assures maximum stability in all photomacrography, this unit is highly recommended when photographing either flat or three-dimensional objects. Unusually sturdy, the stand features a heavy-duty 39.4x45cm 15½ x 17¾ in.) baseboard and a 61cm (24 in.)-high chrome tube 5cm (2 in.) in diameter to provide secure support for camera and macro equipment.

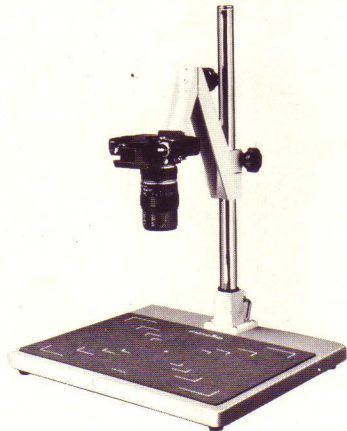



### Magnifier V


This is a useful tool for precise focusing when making photomicrographs, copying, and taking distant telephoto pictures. It features an adjustable eyepiece and 2.5X magnifying power. It slides on over the camera eyepiece and can be focused for individual eyesight.

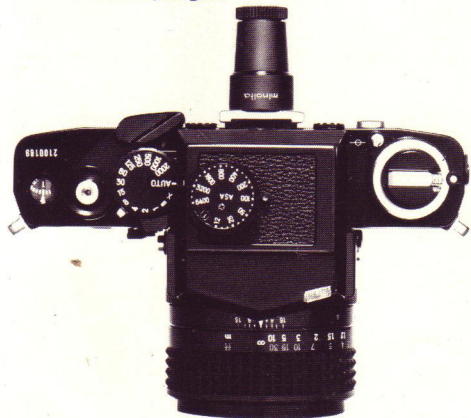

### Angle Finder V

This device permits viewing with the camera held below the eye. It can be focused for individual eyesight, and is ideal for microscopic photography and many other applications. It slides on over the camera eyepiece.



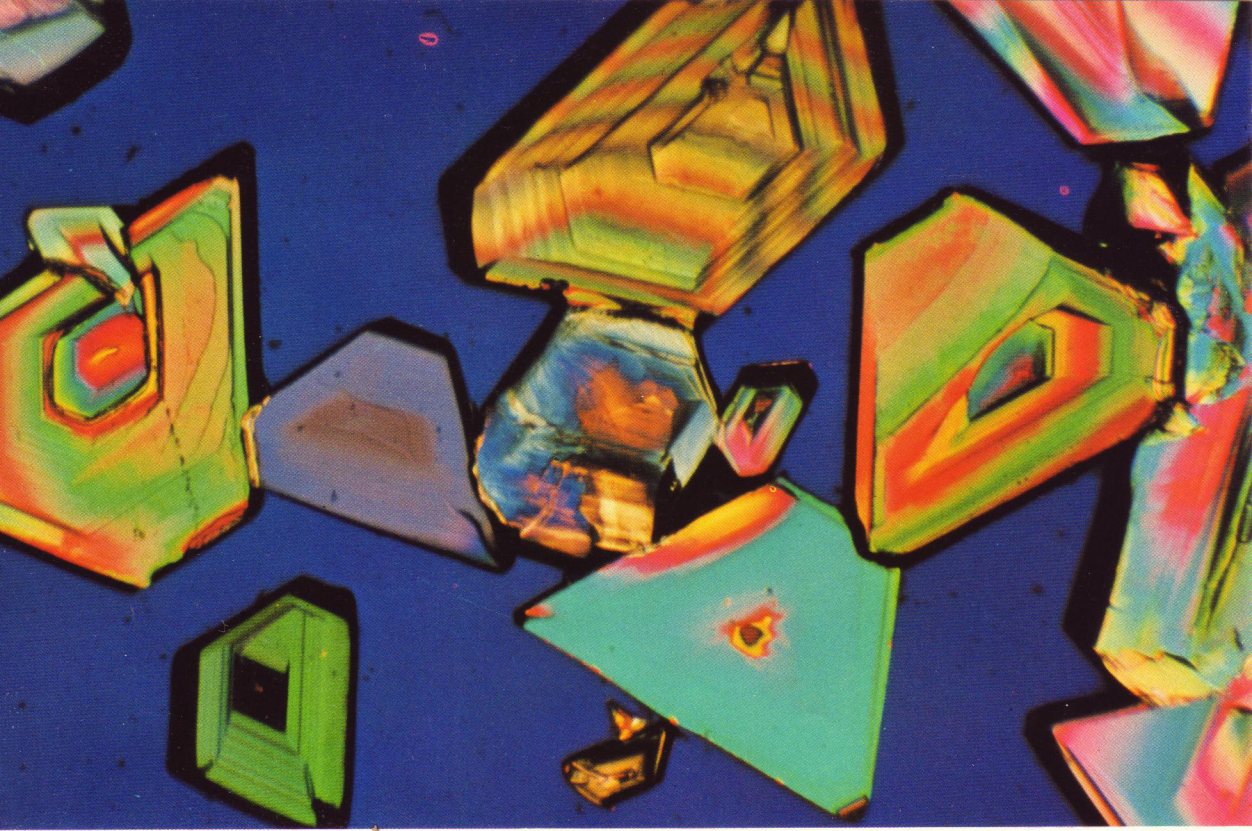

## Photography Through the Microscope

Going from several diameters' magnification with photomacrography to tens or hundreds of diameters, we descend into an even stranger and more fascinating microcosm. Using your Minolta SLR in combination with one of the following units, you can capture on film the beauties and mysteries of this normally invisible world of photomicrography. Included in this group of products for use with these SLR's is the relatively simple and inexpensive Minolta Microscope Adapter; the precise and versatile Leitz-system Micro-attachment; and the sophisticated Microscope Photo Unit II by Minolta. One of these should meet your photomicrography needs, whether simple or complex, in the most demanding scientific work or in shooting for sheer illustrative or abstract effects.

### Microscope Adapter

This two-piece device is used to connect an SLR camera to a microscope. One section bayonets into the camera body in place of the lens, while the other end fits into the ocular adapter tube section of the microscope. Taking photomicrographs is convenient with this adapter because you can follow moving specimens up to the precise moment of exposure. The adapter fits ocular tubes from 23mm to 29mm in diameter.



**Leitz "Micro-attachment"**

The Minolta SLR bayonet-mount connecting adapter on this attachment makes Minolta single-lens reflexes a part of the Leitz "Universal Camera System for Photomicrography." A highly sensitive built-in phototube sensor enables rapidly making very delicate exposure measurements even of small object details. A vibration absorber is built into the top of the Micro-attachment to prevent any image unsharpness due to transmitted vibration. The field of view as it will appear on the film is clearly visible in the camera viewfinder, making it easy to follow moving specimens up to and after the moment of exposure.



(Available only through)  
Leitz Dealers




## Minolta Flash Units

No matter which of the major types of photo-flash you prefer, it is available from Minolta. There is a unit for your Minolta SLR, whether you use conventional flashbulbs for occasional shooting with maximum light output or choose regular electronic flash (sometimes also called "strobe") for greater action-stopping power, convenience, and economy. Further, with an automatic electronic flash, which figures its own exposure exactly, you'll never have to think of guide-number calculations again. With auto-flash, a sensor receives light reflected from the subject and turns the flash off the micro-second that proper exposure is reached. Two of the Auto-Electroflash units represent the vanguard of the industry in offering the very latest thyristor series circuitry for maximum flashes per battery and shortest recycling time.

### Deluxe Flash Unit III

This compact and powerful flash unit has a folding-type reflector whose bowl adjusts for regular and wideangle lenses and swivels to any of 5 click-stop positions to allow bounce flash, etc. It takes regular-base, pinless-base, and AG-type flash bulbs and can be used either with or without the cord. The unit unfolds and installs on the camera body in seconds.

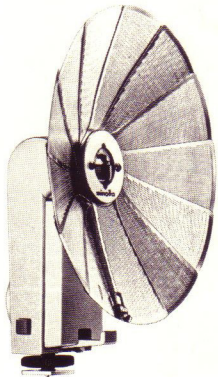

**Electroflash S**

Perfect for both black-and-white and color photography, this well-designed, high-performance electronic flash unit can be used either on cordless direct-contact "hot-shoe" cameras or with attachable cord and conventional brackets and terminals. It gives up to 250 flashes per set of alkaline batteries, up to 80 with sealed carbon-zinc batteries.


**Auto Electroflash 25**

This compact cordless/corded unit with a guide number of 25 (m, ASA 100; 41 for ft., ASA 25) slides into the hot shoe on Minolta SLR cameras and makes completely automatic electronic flash exposures by means of a built-in sensor or can be used as a conventional non-auto unit. Recycling is indicated by a monitor lamp.



### Auto Electroflash 32 and 28

Compact cordless/corded units with guide number of 32 and 28 (in meters at ASA 100, 52 and 46 in feet at ASA 25). Both units provide automatic flash exposure even with bounce operation. Auto Electroflash 32 has an illuminated control dial and can select two different apertures. Optional Ni-Cd battery cartridge, Charger and AC adapter are available.

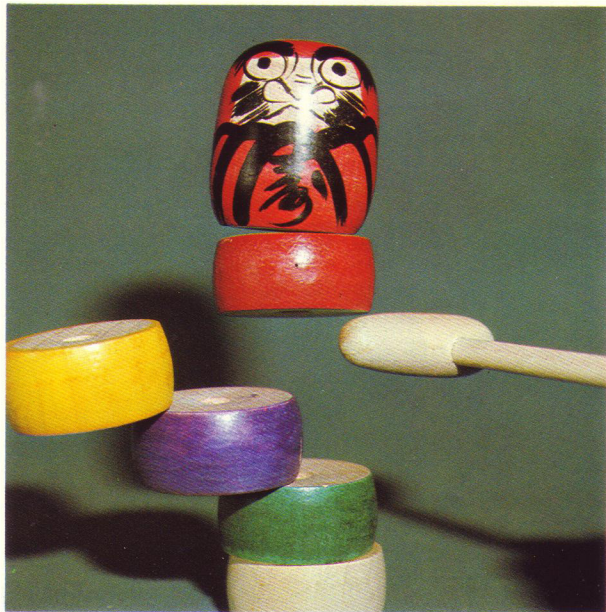

### Auto Electroflash 280

Automatic direct/bounce flash exposure is a feature of this cordless/corded clip-on unit. The 280 yields a maximum guide number of 28 (in meters at ASA 100, 46 in feet at ASA 25). To maximise on energy-saving, a series-thyristor circuit is incorporated to give the shortest recycling time and the maximum number of flashes per battery.

The 280 covers the field of a 35mm lens, and lets you select from four apertures on any setting to get just the shot you want under any conditions. Power sources are alkalimanganese or rechargeable Ni-Cd batteries. Optional Ni-Cd charger is also available.



### Auto Electroflash 450

A versatile system electronic-flash unit, Auto Electroflash 450 yields the maximum guide number of 45 (for calculations in meters at ASA 100, 72 in feet at ASA 25). The 450 does everything the 280 does—and more. The field of a 24mm lens is easily covered with the wideangle diffuser. Automatic bounce/off-camera flash exposure is possible with the attachment of the optional separate sensor. With five apertures to choose from on any setting, perfect exposure is assured. The monitor-lamp circuit provides accurate guide numbers for non-automatic operation. The 450 is powered by alkalimanganese batteries, or optional rechargeable Ni-Cd battery cartridges. An optional charger is available for recharging of cartridge.









## Minolta Light Meters

Besides world-renowned cameras, lenses, and other products, Minolta makes and markets a full line of meters for every major photo-exposure purpose. And at Minolta we produce our own CdS (cadmium-sulfide) and silicon-blue cells for these and the meters built into our cameras.

At the request of NASA, the U.S.A.'s National Aeronautics and Space Administration, Minolta developed and produced the Space Meter, which was used for critical exposure measurement on epoch-making Apollo missions to the moon. This feat gives some indication of the distinguished state of the photometric art at Minolta.

You put this same superior technology to work for you whichever of the remarkable Minolta light meters you may choose.


### Auto Meter II

This sophisticated meter features effortless one-hand operation with a battery-powered, moving scale that gives instant direct reading completely automatically—no needle reading or manual dial alignment is necessary. A sensitivity silicon photo cell and high-grade integrated circuit give both incident and reflected-light readings with high accuracy over an unusually wide range. The light, sturdy unit features automatic over and under-exposure warning indications. Accessories available are: Viewfinder 10° for reflected-light measuring, ND diffusers, spot mask and mini receptor.



### Auto-Spot II and Auto-Spot II Digital

These single-lens reflex exposure meters with 1° angle of acceptance have silicon-photo cells, and operate as rapid as you sight your subject. Illuminated scale in Auto-Spot II and digital display on Auto-Spot II digital enhance easy and accurate readings under dim conditions. ASA range: 3 to 25,000 (12 to 6,400 with "digital") EV range: 3 to 17 (1 to 20) Aperture range: 1 to 45 (1 to 90) Shutter-speed range: 1/2000 to 30 sec. (1/2000 to 15 sec.) Cine range: 8 to 128 fps (with sector opening 180°)

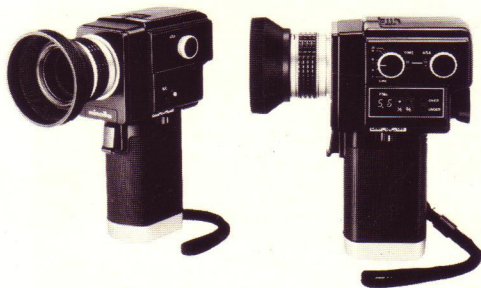



### Flash Meter II

Remarkably accurate thanks to ideal combination of a high-response silicon photo cell with high-stability electronic components, this meter gives incident or reflected readings of bulb or electronic flash as well as continuous illumination. The practical feature of this unit also enables reading the total brightness of multi or sequent flashes. In either way, readings are resistered directly in f-numbers; no calculations or conversions are needed. The Minolta Flash Meter II offers a selection of measuring times (shutter speeds) for convenient measurement of fill-in flash in combination with ambient light. Compact and lightweight, this unit incorporates specially designed LSI (large scale integrated circuit) for computation and A/D (analogue/digital) conversion.

F-numbers are digitally indicated by LED for easy and accurate reading under dim conditions. Optional accessories available for increased versatility include a viewfinder 10°, mini receptor, spherical ND diffuser, flat diffuser and multi-purpose sync. cord.





### Color Meter


Minolta's very compact all-new 3-color measuring Color Meter, designed for precise professional measurement of light color temperature from any source and rapid, direct determination of proper light-balancing and color-correction filters, provides particularly high accuracy by dividing its broad measuring capability into four ranges. The Minolta Color Meter reads a wider range of color temperatures—from 2,500°K to 12,500°K—than any other color meter and gives consistently accurate readings regardless of variations in illumination level within an extremely broad range of from 10 to 128,000 lucas. Red, blue, and green detectors incorporated in the light receptor feature spectral response similar to that of color films. A fourth detector measures incident light for the built-in illumination-intensity meter, permitting use as an ordinary photographic exposure meter or for determining illumination levels for other purposes. Sturdy diecast aluminum body contains a hermetically-sealed transistor circuit that needs no warm-up. Needle locks automatically to "remember" reading.



## Minolta Solid Glass Filters

Minolta's filters are invaluable for correcting or obtaining various photographic effects. They are made of solid glass ground optically flat in Minolta's own factories to prevent distortion and mounted in satin-finish metal rings.

Refer to the following brief explanations to determine which filters best suit your photographic purposes, or consult your Minolta dealer for further information. The table on page 56 indicates the mount diameters in which the various Minolta filters are available.

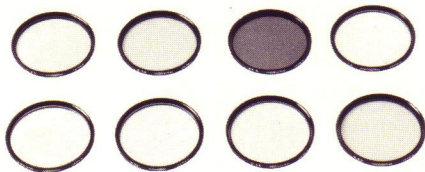

### For Black-and-White Photography

- UV:** This filter absorbs excessive ultraviolet rays when shooting mountain, snow, and other distant scenes. Exposure is the same as without a filter, and it may be kept attached to protect the lens.
- Green:** For correct monochromatic rendition of colored subjects as they appear to the eye, this filter is used with panchromatic film.
- Yellow:** Red and yellow subjects are rendered lighter than the eye sees them by this filter. It tends to increase over-all contrast somewhat and is often used to darken blue skies and emphasize white clouds.
- Orange:** Use of this filter with panchromatic films produces effects similar to but more pronounced than those with a yellow filter.
- Red:** This filter used with panchromatic materials greatly lightens red, produces strong contrast, and can be used for exaggerated cloud effects. Used in combination with infrared film, it eliminates atmospheric haze and produces spectacular, high-contrast effects.

### For Color Photography

- 1A:** Use this filter to improve bluish rendition of subjects in shade illuminated by blue sky, on overcast or rainy days, or obscured by atmospheric haze. It requires no increase in exposure and is often used with color or monochromatic materials to protect the lens.
- 80B:** This filter is used for shooting with daylight-type color film indoors with artificial light of 3400°K color temperature (as of photoflood lamps).
- 85:** Type A color films (balanced for exposure with light of 3400°K color temperature) can be used in daylight by exposing through this filter.

### For Black-and-White and Color Photography


- Polarizing Filter:** This filter is ideal for reducing or eliminating specular reflections as from glass or water to provide clearer views or richer tones or textures; it can also be used to darken skies in either color or monochrome.
- ND X4:** Used to adjust light volume from a scene or subject, this neutral density filter can be employed to avoid overexposure (as when shooting beach or brilliant snow scenes, especially with fast films). It is also useful for depth-of-field control under certain conditions to emphasize a subject against an out-of-focus background.

### Filter Sizes


L37 (UV)							72mm*
L39 (UV)	46mm	49mm	52mm	55mm	62mm		
Y48 (Yellow)		49mm	52mm		62mm		
Y52 (Yellow)	46mm			55mm			72mm*
R60 (Red)			52mm	55mm			72mm*
O56 (Orange)			52mm	55mm			72mm*
GO (Green)			52mm	55mm			
Polarizing			52mm	55mm			
80B	46mm	49mm	52mm	55mm			72mm*
85			52mm	55mm			72mm*
1A		49mm	52mm	55mm		67mm	72mm*
ND	46mm	49mm	52mm	55mm			72mm*

\* Achromatic coated

With Polarizing Filter

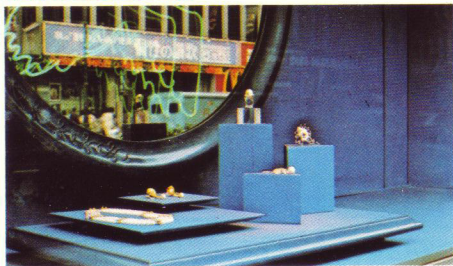


No Filter

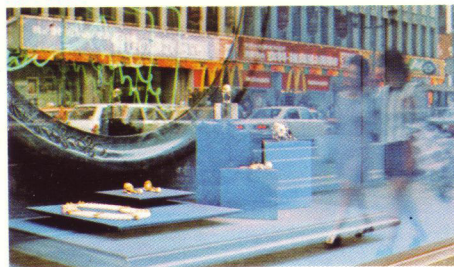




### Eyepiece Correction Lenses

Focusing aid for far- and near-sighted photographers is provided by these special lenses which snap into grooves provided in the camera eyepiece. Minolta makes nine different diopter strengths, from  $-4$  to  $+3$ .

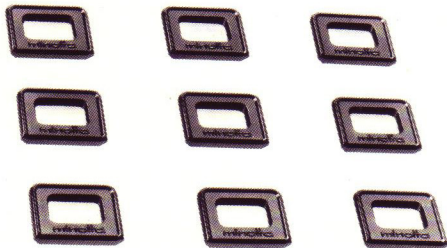

### Panorama Head

Installed between a Minolta SLR camera and tripod, the panorama head allows shooting up to  $360^\circ$  panoramic views in overlapping sections without misjudging the camera's coverage of any section. Its rotation scale is marked in  $12^\circ$  graduations, with click stops every  $24^\circ$ . A built-in spirit level aids proper camera positioning. A chart provided with the panorama head shows the number of sectional pictures required when using various Minolta interchangeable lenses, as well as the overlap between sections.

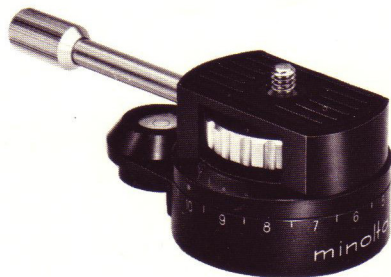


**Slide 300 Projector**

Deceptively small and lightweight, this new projector offers big performance: It projects both 35mm and 16mm slides with sharp Rokkor lenses, featuring semi-automatic slide positioning and stacking in order after showing. An efficient condenser system makes for bright, evenly-lighted screen images, and a high-performance sirocco fan gives cool operation and protects slides. Optional accessories include a lens for 16mm projection, an autochanger, tele/wide conversion lens, strip-film carrier, and projection screens.



### Lens Mount Adapters

Minolta makes Leica and Praktica lens adapters, both of which lock securely on Minolta SLR camera bodies with the use of the special key provided. Any Praktica-mount lens can be used with SLR cameras and can be focused throughout its full range. Leica-mount lenses can be used only for close-ups and copying, since their back focus is different from Rokkors'.

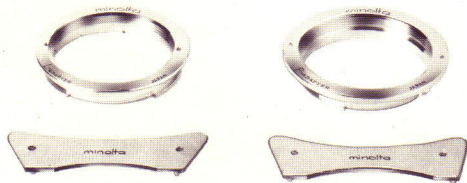

### Cable Release II

This very flexible metal release threads directly into the shutter release button on Minolta SLR's and is essential for steady tripod exposures, photomicrography, photomacrography, and telephotography. It features a convenient coaxial type lock, which facilitates making time exposures.



This booklet has briefly described many of the Rokkor lenses and the accessories of Minolta's extensive SLR system. You can use them either with a standard Minolta SLR or on one of our new electronic shutter models offering interchangeable finders and fully automatic exposure control. Either way, you'll enjoy genuine Minolta quality, precision, and the handling and operating ease we are famous for.

Be sure to talk with your Minolta dealer; he can help you learn more about all the fine Minolta products and what they can do for you. Or contact the Minolta distributor or branch office in your area.

Minolta Camera Co., Ltd., 30, 2-Chome,  
Azuchi-Machi, Higashi-Ku, Osaka 541, Japan

Minolta Corporation, 101 Williams Drive,  
Ramsey, New Jersey 07446, U.S.A.

Minolta Camera Handelsgesellschaft m.b.H.,  
Kurt-Fischer-Strasse 50, D-2070 Ahrensburg,  
West Germany

Minolta France S.A., Tour Albert 1er, 65,  
Avenue de Colmar, 92508 Rueil-Malmaison,  
France

Minolta Hong Kong Limited,  
49 Chatham Road, Kowloon, Hong Kong

Minolta Singapore (Pte) Ltd., Tong Fong  
Bldg., 52-E, Chin Swee Road, Singapore 3





**Minolta**

A GUIDE  
A GUIDE TO TH  
A GUIDE TO THE MINO  
THE MINOLTA S  
SLR SYS  
CREA