

WILSONWERKS ARCHIVES

This camera manual is for reference and historical purposes, all rights reserved.

This cover page is copyrighted material. This document may not be sold or distributed without the express consent of the publisher.

©2008-2012 wilsonwerks Llc

TAMRON ADAPTALL-2 INTERCHANGEABLE CUSTOM MOUNTS INSTRUCTIONS



ADAPTALL-2

Be sure to use an appropriate ADAPTALL 2 mount for CANON FD, MINOLTA MD, KONICA AR and CONTAX respectively for the TAMRON new SP/ADAPTALL 2 lenses.

The TAMRON ADAPTALL 2 Custom Mount attaches simply and securely to your TAMRON SP and ADAPTALL 2 Automatic SLR Lens becoming in effect, an integral part of the lens. With the Tamron ADAPTALL 2 Custom Mount System, your lens can be used with virtually all the most popular SLR cameras by attaching the appropriate mount.

HOW TO ATTACH THE MOUNT TO THE LENS

- A. Align the green dot on the base of the lens with the green dot on the ADAPTALL 2 mount.



- B. Press the mount downward and turn clockwise until the mount is locked into place (while turning, the silver release button will slowly depress and then will open and click when the mount locks into position).



- C. Slide the coupling key of the mount into the matching slot of the lens aperture ring. Sometimes the coupling key will slide into the matching slot after step B and therefore this step may not be necessary.



NOTE: The CANON FD and MINOLTA MD mounts have two coupling keys.

TO REMOVE THE MOUNT FROM THE LENS

For CONTAX/YASHICA, MINOLTA MD and OLYMPUS OM


- A. Hold your lens securely and while depressing the silver release button, turn the ADAPTALL 2 mount counter-clockwise.
- B. Lift the mount from the lens.



For CANON FD and KONICA AR

A. The lens aperture ring must be set to the AE position.


- NOTE: These mounts incorporate an AE lock lever which must be depressed when setting lens to the AE position.
- B. Hold your lens securely and while depressing the silver release button, turn the ADAPTALL 2 mount counter-clockwise.
 - C. Lift the mount from the lens.

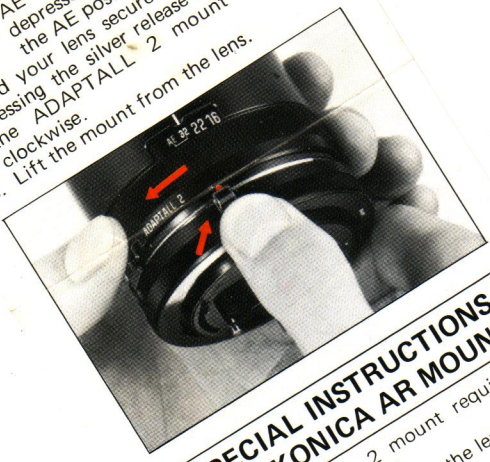

SPECIAL INSTRUCTIONS FOR KONICA AR MOUNT

This ADAPTALL 2 mount requires one additional adjustment before it is mounted on the lens.

- A. On the rear of the mount (see diagram below) there are two locking screws (1) and (2). Loosen these screws with a coin by turning counterclockwise.
- B. Slide the knob (3) to align the index (4) with the corresponding f value, while holding the locking screw (1) with your fingers.
- C. Tighten the two locking screws (1) and (2) firmly with a coin.



NOTE: ADAPTALL 2 MOUNTS ARE DESIGNED FOR USE ONLY WITH TAMRON S₃ AND ADAPTALL 2 LENSES. USE WITH ANY OTHER LENSES WILL RESULT IN INCORRECT METER COUPLING.

For complete details for all TAMRON LENSES AND MOUNTS, see your local camera dealer.

Manufacturers of lenses for photographic, industrial, laboratory, video, and scientific applications.

TAMRON CO., LTD.
 17-11, 7-chome, Takinogawa, Kita-ku
 Tokyo, Japan.
 Tel: (03) 916-0131
 Cable: "TAMRON TAISEI TOKYO"
 Telex: 272-2220 TAMRON

Printed in Japan
 790320000U

TAMRON ADAPTALL-2 INTERCHANGEABLE CUSTOM MOUNTS INSTRUCTIONS




Be sure to use an appropriate ADAPTALL 2 mount for CANON FD, MINOLTA MD, KONICA AR and CONTAX respectively for the TAMRON new SP/ADAPTALL 2 lenses.

The TAMRON ADAPTALL 2 Custom Mount attaches simply and securely to your TAMRON SP and ADAPTALL 2 Automatic SLR Lens becoming in effect, an integral part of the lens. With the Tamron ADAPTALL 2 Custom Mount System, your lens can be used with virtually all the most popular SLR cameras by attaching the appropriate mount.

HOW TO ATTACH THE MOUNT TO THE LENS

- A. Align the green dot on the base of the lens with the green dot on the ADAPTALL 2 mount.

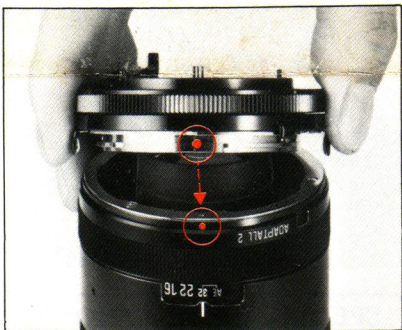

- B. Press the mount downward and turn clockwise until the mount is locked into place (while turning, the silver release button will slowly depress and then will open and click when the mount locks into position).



- C. Slide the coupling key of the mount into the matching slot of the lens aperture ring. Sometimes the coupling key will slide into the matching slot after step B and therefore this step may not be necessary.




NOTE: The CANON FD and MINOLTA MD mounts have two coupling keys.

TO REMOVE THE MOUNT FROM THE LENS

For CONTAX/YASHICA, MINOLTA MD and OLYMPUS OM

- A. Hold your lens securely and while depressing the **silver release button**, turn the ADAPTALL 2 mount counter-clockwise.
- B. Lift the mount from the lens.

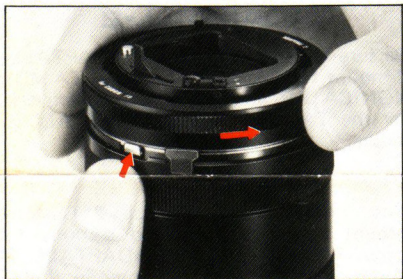


For CANON FD and KONICA AR

- A. **The lens aperture ring must be set to the AE position.**

NOTE: These mounts incorporate an AE lock lever which must be depressed when setting lens to the AE position.


- B. Hold your lens securely and while depressing the silver release button, turn the ADAPTALL 2 mount counter-clockwise.
- C. Lift the mount from the lens.

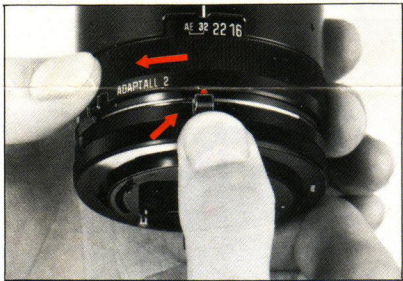

SPECIAL INSTRUCTIONS FOR KONICA AR MOUNT

This ADAPTALL 2 mount requires one additional adjustment before it is mounted on the lens.

- A. On the rear of the mount (see diagram below) there are two locking screws (1) and (2). Loosen these screws with a coin by turning counterclockwise.
- B. Slide the knob (3) to align the index (4) with the corresponding f value, while holding the locking screw (1) with your fingers.
- C. Tighten the two locking screws (1) and (2) firmly with a coin.



NOTE: ADAPTALL 2 MOUNTS ARE DESIGNED FOR USE ONLY WITH TAMRON SP AND ADAPTALL 2 LENSES. USE WITH ANY OTHER LENSES WILL RESULT IN INCORRECT-METER COUPLING.

For complete details for all TAMRON LENSES AND MOUNTS, see your local camera dealer.

Manufacturers of lenses for photographic, industrial, laboratory, video, and scientific applications.

TAMRON CO., LTD.

17-11, 7-chome, Takinogawa, Kita-ku Tokyo, Japan.

Tel: (03) 916-0131

Cable: "TAMRONTAISEI TOKYO"

Telex: 272-2220 TAMRON

Printed in Japan

790320000U